

**plantronics®**

**LEARN  
MORE**

**M100™ Bluetooth® Headset**


# TAKE A GOOD LOOK

## CALL BUTTON

- Take a call or end it (1 tap)
- Redial (2 taps)
- Initiate phone's voice-dialing (2-second press until tone heard)
- Reconnect lost connection (1 tap)
- Activate pairing after initial set up (press until LED flashes red/blue)
- Activate multipoint (press while powering on)
- Transfer a call to/from headset (1-second press while on a call)

## POWER SWITCH

- On (slide to reveal black)
- Off (slide to reveal red)

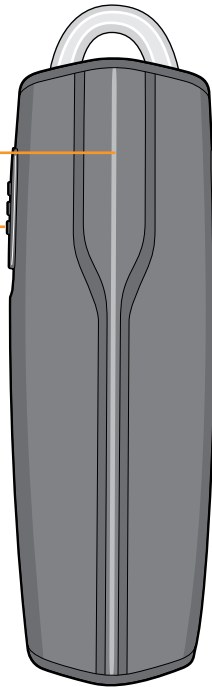

## MICRO USB CHARGING PORT


- With AC charger:
  - 30 minutes (2 hours talk time)
  - 90 minutes (full charge)
- Best performance when fully charged

## VOLUME/MUTE BUTTON

- Min-Lo-Med-Hi-Max (1 tap per level change)
- Mute: on/off (1-second press)


## LED

- Charging (solid red)
- Fully charged (solid blue)
- Low battery (2 red flashes, 2 tones)
- Critically low (3 red flashes, 3 tones)
- Multipoint (on=2 blue flashes, and off=1 blue flash)

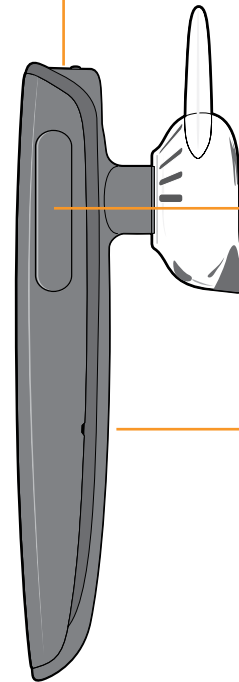

Be safe! Please read the safety guide before using your new headset.

# CONNECT TO YOUR PHONE

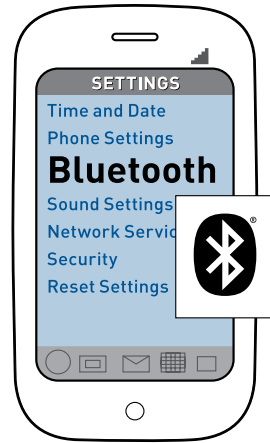

## 1. READY

Activate the Bluetooth feature on your phone, then use the phone's settings to add/search/discover new Bluetooth devices.

**iPhone:** Settings > General > Bluetooth>On  
(starts the search for devices)

**BlackBerry® smartphone:** Settings/options > Bluetooth: On > Search for devices

**VIDEO TUTORIAL IN USA:**  
[www.plantronics.com/pairing](http://www.plantronics.com/pairing)



## 2. SET

### First Time:


With headset turned off, activate Bluetooth pairing mode by sliding Power switch on. The LED flashes red/blue to indicate pairing mode.

### Activate Multipoint:

While pressing the Call button, turn on the headset and keep pressing the Call button until LED flashes blue twice. (Repeat to deactivate.)

### Pairing New Phone/ Reconnecting Original:

Turn on the headset then press and hold the Call button until the LED flashes red/blue.

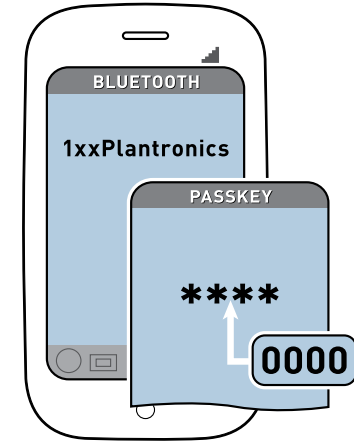

## 3. CONNECT

Select "1xxPlantronics" from the list of Bluetooth devices shown on your phone.

If phone asks for a passcode, enter four zeros (0000). You may see \*\*\*\* on screen.

Some phones also ask to confirm headset connection after pairing.

Headset LED will stop flashing red/blue once your phone and headset are successfully paired/connected.

"Pairing" connects your headset to your phone.  
"Multipoint" lets you use this headset with two phones.  
(Activate this feature before pairing your second phone.)


# FIND YOUR GROOVE

The loop of the gel eartip tucks into the back curve of your ear for a stable fit.

Try on the headset. The eartip is positioned to suit most people, but you may want to rotate it to best fit your left or right ear.


The gel eartip and speaker click into matching grooves so the eartip doesn't move out of place during use.

The loop on the gel eartip should point away from the headset. (Do not rotate the eartip too far.)

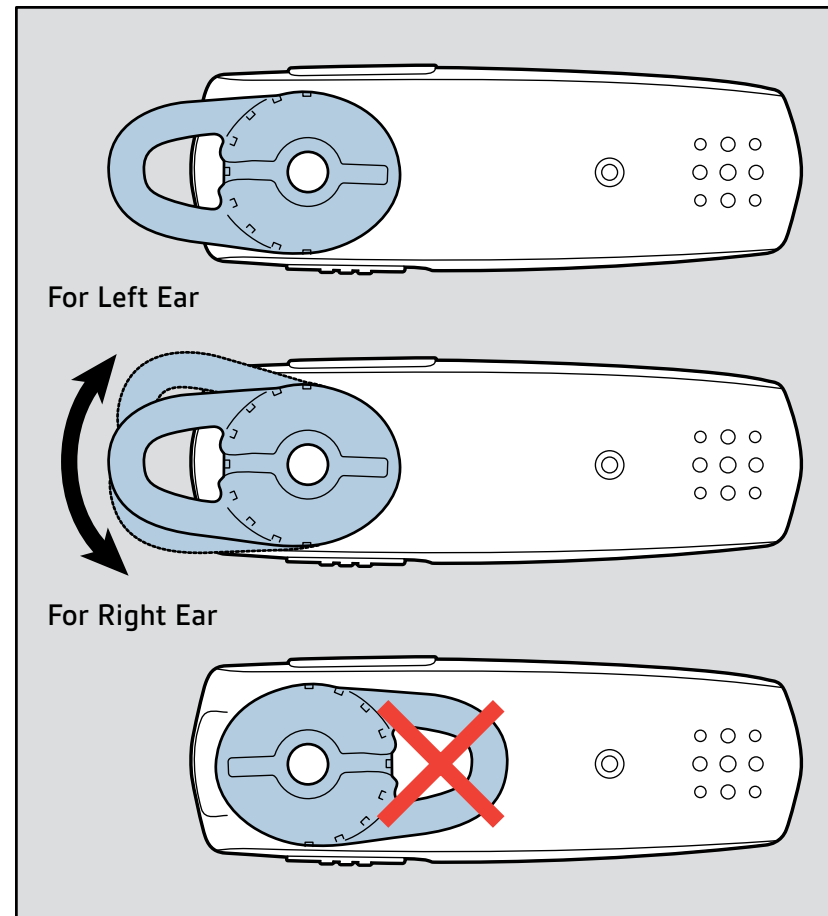


# MIX AND MATCH FOR BEST FIT


If the gel eartip feels loose or tight in your ear, then change it. To replace the medium gel eartip for small or large, pull the loop of the gel eartip to remove it. (Don't pull on the speaker base and stem.)

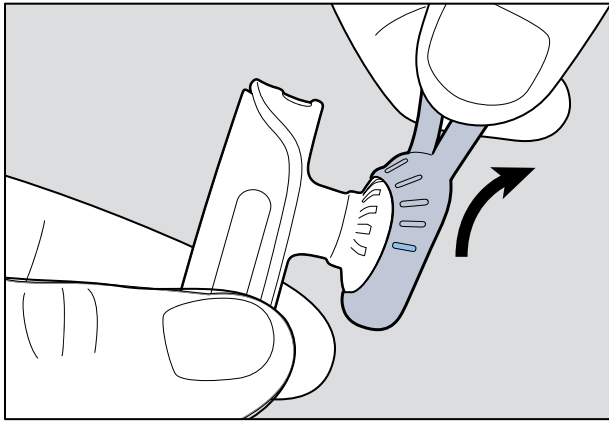

Using your thumb, tuck the bottom of the eartip over the speaker and pull the loop of the eartip over the speaker. (Don't push the speaker through the gel eartip.)

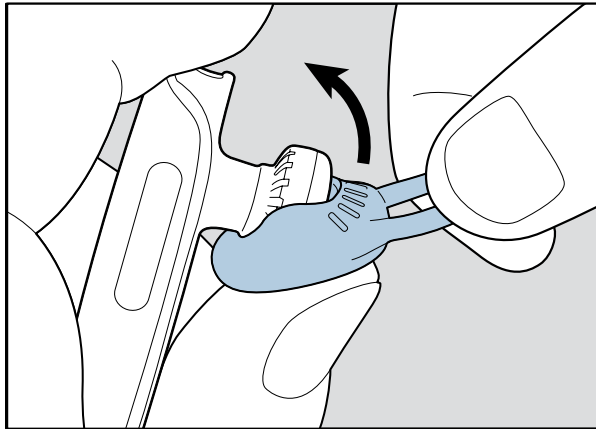

If you aren't familiar with this style of gel eartip, clip on the earloop to the stem for extra stability.

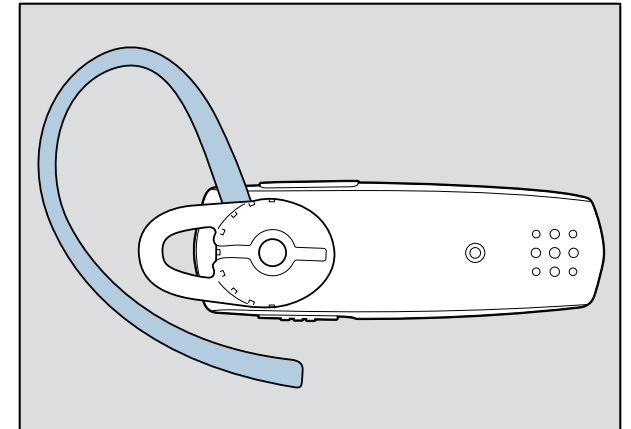

**VIDEO TUTORIAL:**

[www.plantronics.com/M100fit](http://www.plantronics.com/M100fit)

# MORE ABOUT MULTIPOINT

Plantronics M100 supports multipoint technology, which allows you to use one headset with two different Bluetooth mobile phones.

To pair your headset to a second phone, see "[Connect to Your Phone](#)."

## How to Initiate a Call

When multipoint is on, the headset controls initiates or redials a call from the phone that last made an outgoing call.

To use the second paired phone instead, make the call using the controls on that phone. The second phone activates its link with the headset.

**NOTE:** The headset cannot place a current call on hold while answering a call from the second phone.

## How to Answer a Call While Talking on the Other Paired Phone

To answer a second call on the other phone, the current call must be terminated or transferred back to the first phone. To transfer the call, see "Take a Good Look."

To answer the incoming call and terminate first call, simply tap the Call button.

If you choose not to answer, the second call will go to voice mail.

# LISTEN TO THE VOICE

This headset whispers various status alerts when you power on/off, run low on talk time, or lose/reconnect the Bluetooth connection to your phone.

<b>WHAT YOU'LL HEAR</b>	<b>WHEN YOU'LL HEAR IT</b>
<b>Power On</b>	After sliding the Power switch to "on" position
<b>Power Off</b>	After sliding the Power switch to "off" position
<b>Talk Time: (5 hrs, 4 hrs, 3 hrs, 2 hrs, 1 hr)</b>	After sliding the Power switch to "on" position
<b>Battery Low</b>	When you have approximately 30 minutes left before the battery must be recharged
<b>Recharge Headset</b>	When you have approximately 15 minutes left before the battery must be recharged
<b>Phone 1 Connected</b>	After sliding the Power switch to "on" position or reconnecting a dropped Bluetooth connection
<b>Phone 2 Connected</b>	After pairing a second phone using multipoint feature
<b>Pairing</b>	While the headset and phone are trying to pair/connect
<b>Pairing Successful</b>	After the headset and phone are successfully paired/connected
<b>Pairing Incomplete, Restart Headset</b>	After the headset and phone tried to pair but failed
<b>Volume Maximum</b>	When the highest volume level is reached after tapping Volume button
<b>Mute On</b>	After pressing Volume button for 1 second during a call
<b>Mute Off</b>	When on mute, after pressing Volume button for 1 second
<b>Lost Connection</b>	When the phone loses the Bluetooth connection with the headset
<b>Multipoint On</b>	After activating the feature by pressing Call button while sliding the Power switch to "on" position
<b>Multipoint Off</b>	After deactivating the feature by pressing Call button while sliding the Power switch to "off" position

# TIPS

## **Pair/Connect Just Once**

Pairing is a one-time process unless your phone loses the connection or you want to pair a new phone.

## **Watch for Flashing Red LED**

This headset will visually warn you when your battery is low and needs to be recharged.

## **Continue a Call Without the Headset**

If you need to continue a call without using your headset, just press the Call button for 1 second and the call transfers back to your phone. You will hear a tone to confirm the transfer.

## **Stay Near Your Phone:**

Bluetooth has a working “range” of up to 33 feet between the phone and headset before audio degrades and the connection is lost.

## **Know How to Reconnect:**

Your headset tries to reconnect a lost connection. If it can't, then tap the Call button once or manually reconnect via the phone's Bluetooth device menu.


## **Reset if You Cannot Reconnect**

If your headset was working but now won't connect, remember that newer phones are like small computers, so they may become corrupt over time and you may need to reset them every so often.

Simply turn your phone off and remove the battery for a few seconds, then replace the battery and turn it back on again. If this does not resolve the issue, delete the pairing information for your M100 headset and pair it with your phone again.

## **Sound Your Best:**

For best voice pickup, always check that the headset points towards the corner of your mouth.

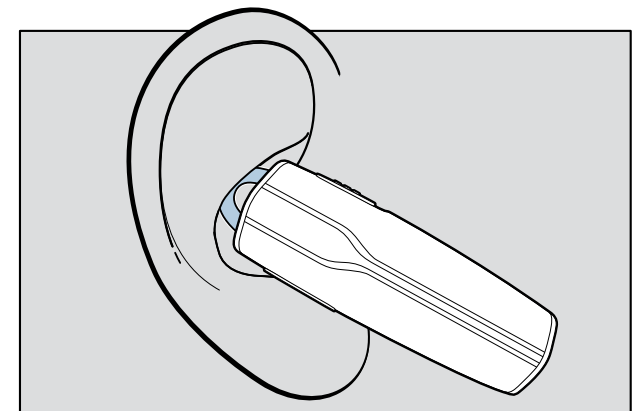



# SPECIFICATIONS

<b>Talk Time</b>	Up to 6 hours
<b>Standby Time</b>	Up to 10 Days
<b>Operating Distance (Range)</b>	Up to 33 feet (10 meters), Class II
<b>Headset Weight</b>	9 grams
<b>Headset Dimensions</b>	55 x 18.5 x 8.1 mm
<b>Charge Connector</b>	Micro USB charging
<b>Battery Type</b>	Rechargeable non-replaceable lithium ion polymer
<b>Charge Time (Maximum)</b>	90 minutes for full
<b>Power Requirements</b>	5V DC – 180mA
<b>Bluetooth Version</b>	2.1 specifications with EDR
<b>Bluetooth Profiles</b>	Hands-Free (HFP) Profile 1.5 and Headset (HSP) Profile 1.1
<b>Operating Temperature</b>	32°F - 104°F (0 - 40°C)
<b>Storage Temperature</b>	32°F - 104°F (0 - 40°C)
<b>Charging Temperature</b>	32°F - 104°F (0 - 40°C)

# NEED MORE HELP?

**Phone support in USA:**

1-866-363-BLUE (2583)

**FAQs:**

[www.plantronics.com/M100faq](http://www.plantronics.com/M100faq)

**1-year limited warranty details:**

[www.plantronics.com/warranty](http://www.plantronics.com/warranty)

© 2011 Plantronics, Inc. All Rights Reserved. Plantronics is a trademark or registered trademark of Plantronics, Inc. The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Plantronics, Inc. is under license. iPhone is a trademark of Apple Inc. registered in the U.S. and other countries. Blackberry is owned by Research In Motion Limited and is registered in the United States and may be pending or registered in other countries. Plantronics, Inc is not endorsed, sponsored, affiliated with or otherwise authorized by Research In Motion Limited. Patents US 5,712,453; Patents Pending AM84466-01 (03/11)



Z109  
N10687